
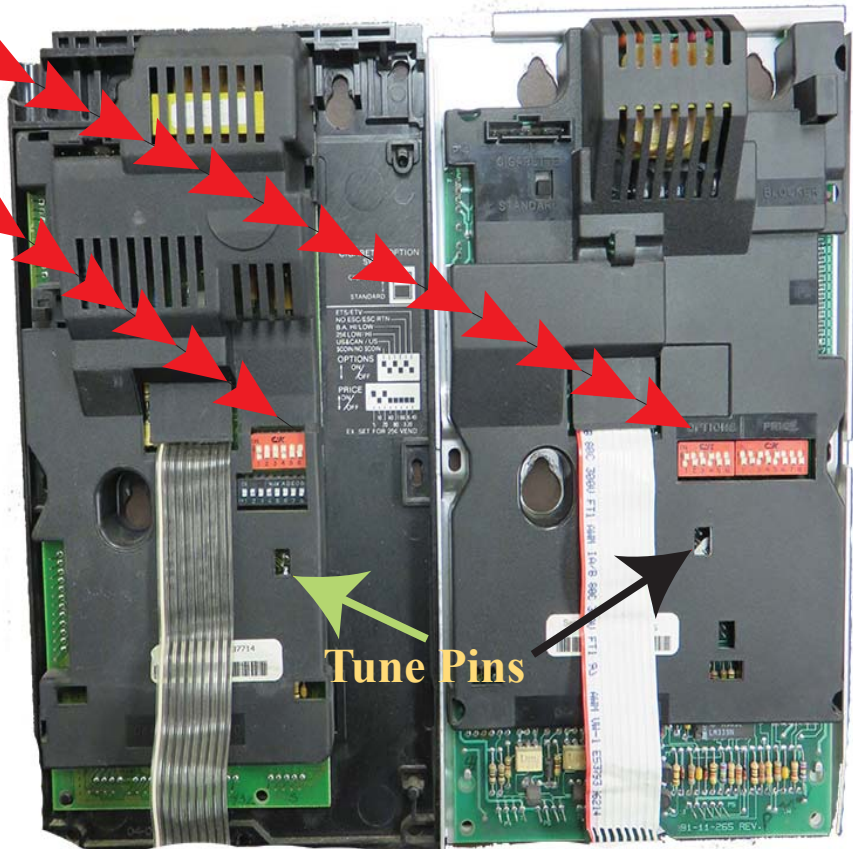


# TRC6800 Tuning Procedure

1. Power down the Changer
2. Do NOT unplug the Acceptor at anytime during the Tuning Process.
3. Set switches to the following: 1-2-4-5 ON and 3-6 OFF
4. On unit with Cigarette Switch, this switch must be OFF
5. Open Acceptor and short out the 2 pins (lower right of control board)
6. While the pins are shorted power up the changer--un-short the pins--close acceptor.
7. Drop in US Coins:
  - Drop in 2 Nickels
  - Drop in 2 Dimes
  - Drop in 2 Quarters
  - Drop in 2 US Golden Dollars
8. The quarter and nickel tubes should have the lower sensors covered.

**NEVER HOT PLUG---EQUIPMENT DAMAGE COULD OCCUR**

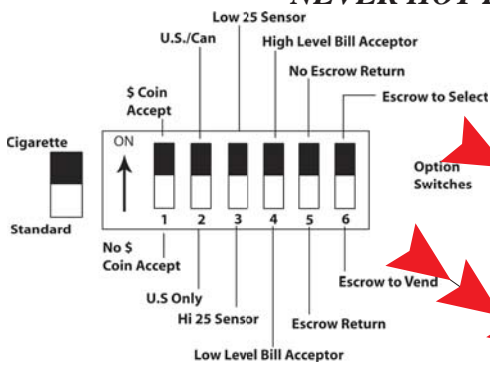

**New Style  
Control Board**

**Old Style  
Control Board**



**Vendors  
Repair  
Service<sup>®</sup>**  
Inc.

888.396.8363 - Atlanta  
800.248.1712 - Orlando

[www.vendorsrepair.com](http://www.vendorsrepair.com)

V  
R  
S  
  
T  
E  
C  
H  
  
T  
I  
P  
S